GE Energy



One engine. Three powerful results.

Combined power generation with Jenbacher gas engines.



GE imagination at work

trigeneration of heat, cooling, and power

Absorption chillers provide an economic and environmental alternative to conventional refrigeration. Combining high efficiency, low emission power generation equipment with absorption chillers allows for maximum total fuel efficiency, elimination of HCFC/CFC refrigerants and reduced overall air emissions.

possibilities for refrigeration

Absorption chillers:

- Operation with hot water
- Operation with steam
- Direct heat through combustion

Compression-type refrigeration machines:

- Direct drive power
- Electrical drive power

absorption chillers


Absorption chillers produce chilled water by heating two substances (e.g., water and lithium bromide salt) that are in thermal equilibrium to separation, then reuniting them through heat removal. The heat input and removal, achieved in a vacuum at varying pressure conditions (approximately 8 mbar and approximately 70 mbar), brings the materials into imbalance, thereby forcing them to undergo desorption or absorption. Water (refrigerant) and lithium bromide salt (absorbent) are generally used for generation of chilled water in the temperature range from 6 to 12°C. Ammonia (refrigerant) and water (absorbent) are used for low temperature chilling down to -60°C. CHCP (combined heat, cooling, and power) systems – also called trigeneration systems – are the combination of cogeneration plants with absorption chillers and offer an optimal solution for generating air conditioning and/or refrigeration.

the Jenbacher concept

Combining a cogeneration plant with an absorption refrigeration system allows utilization of seasonal excess heat for cooling. The hot water from the cooling circuit of the cogeneration plant serves as drive energy for the absorption chiller. The hot exhaust gas from the gas engine can also be used as an energy source for steam generation, which can then be utilized as an energy source for a highly efficient, double-effect steam chiller. Up to 80% of the thermal output of the cogeneration plant is thereby converted to chilled water. In this way, the year-round capacity utilization and the overall efficiency of the cogeneration plant can be increased significantly.

CHCP systems supply energy in three forms:

- Electricity
- Heat
- Chilled water

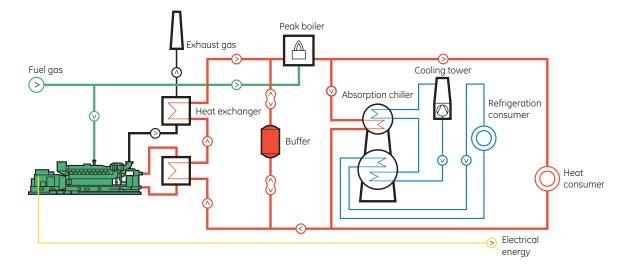

advantages of trigeneration systems over conventional refrigeration technology

- Operated with heat, utilizing relatively inexpensive "excess energy"
- Produced electricity can be fed into the public grid or used to cover electricity requirements of the plant
- During cold seasons the heat can be utilized to cover heat requirements
- No moving parts in absorption chillers, no wear and therefore low maintenance expenses
- Noiseless operation of the absorption system
- Low operating costs and life-cycle costs
- Water as refrigerant, no use of ozone-damaging substances

Absorption-type refrigeration technology offers the most established and economic solution for reduced emission, air conditioning systems.

key figures

- Approximately 150 to 170 kW of cold output is required per 1,000 m² of office space
- The term tons of refrigeration (TR) is generally used as the unit of cold energy: 1 TR(US) = 3.52 kWh, 1 TR(metric) = 3.86 kWh
- The term coefficient of performance (COP) is used for referring to the efficiency of an absorption chiller. For a hot water chiller, the COP lies between 0.6 and 0.8 and for a double-effect steam chiller between 1.2 and 1.3
- Cold water temperatures down to 4.5°C can be achieved with lithium bromide salt; with ammonia, temperatures down to -60°C can be achieved

our competence

Across the world, there is a new emphasis on projects that combine climate protection and economical primary power generation. Absorption chiller technology represents an optimal solution for a year-round efficient source of cooling and heat, especially when used in conjunction with a gas engine cogeneration plant. More than 350 systems with Jenbacher engines in combination with absorption chillers have been delivered worldwide. With its experience and close cooperation with absorption chiller manufacturers, the Jenbacher product team is constantly working on customized solutions in this area.





GE's Jenbacher gas engine division is one of the world's leading manufacturers of gas-fueled reciprocating engines, packaged generator sets and cogeneration units for power generation. It is one of the only companies in the world focusing exclusively on gas engine technology.

GE's Jenbacher gas engines range in power from 0.25 to 3 MW and run on either natural gas or a variety of other gases (e.g., biogas, landfill gas, coal mine gas, sewage gas, combustible industrial waste gases).

A broad range of commercial, industrial, and municipal customers use Jenbacher products for on-site generation of power, heat, and cooling. Patented combustion systems, engine controls, and monitoring enable its power generation plants to meet stringent emission standards, while offering high levels of efficiency, durability, and reliability.

GE's Jenbacher product team has its headquarters, production facilities, and 1,300 of its about 1,700 worldwide employees in Jenbach, Austria.



for more information on Jenbacher gas engines

Austria (Headquarters)

Achenseestraße 1-3 6200 Jenbach T +43 5244 600-0 F +43 5244 600-527 jenbacher.info@ge.com www.gejenbacher.com

Bulgaria

36, Dragan Tsankov Blvd. 1040 Sofia T +359 2 971 4390 F +359 2 971 4384 jenbacher.bulgaria@ge.com

China

8 Floor, The Lee Gardens 33 Hysan Avenue Causeway Bay Hong Kong T +852 2100 6976 F +852 2100 6630 jenbacher.asiapacific@ge.com

18/F., Kerry Center 1 Guanghua Road, Chaoyang District Beijing 100020 T +8610 5822 3821 F +8610 8529 6283 jenbacher.china@ge.com

Denmark

Samsøvej 10 8382 Hinnerup T +45 86966788 F +45 86967072 jenbacher.scandinavia@ge.com

Egypt

54 Lebanon Street El Mohandessin, Floor 13 Cairo T + 20 2 33018000 jenbacher.egypt@ge.com

Germany

Amselstraße 28 68307 Mannheim T +49 621 77094-0 F +49 621 77094-70 jenbacher.germany@ge.com

Hungary

Kisret út 1 2112 Veresegyház T +36 2858 7376 F +36 2858 7491 jenbacher.hungary@ge.com

Italy

Via Črocioni, 46/H 37012 Bussolengo (VR) T +39 045 6760211 F +39 045 6766322 jenbacher.italy@ge.com

North America

5244 North Sam Houston Pkwy E. Houston, TX 77032 T +1 832 2955600 F +1 281 4429994 jenbacher.us@ge.com

Russia

Taganskaya Street, 17-23 Business Center Mosenka 4 109147 Moscow T +7 495 7755885 1015 F +7 495 77558 84 jenbacher.russia@ge.com

Spain and Portugal

Avda. del Camino de lo Cortao, 34 – Nave 8 28703 San Sebastián de los Reyes (Madrid) T +34 916586800 F +34 916522616 jenbacher.iberica@ge.com

The Netherlands

Kelvinring 58 2952 BG Alblasserdam T +31 88 0019700 F +31 88 0019701 jenbacher.netherlands@ge.com © 2008 GE Jenbacher GmbH & Co OHG. All rights reserved.



GE imagination at work